arXiv:1403.0320v1 [cs.CV] 3 Mar 2014

Matching Image Sets via Adaptive Multi Convex Hull

Shaokang Chen, Arnold Wiliem, Conrad Sanderson, Brian C. Lovell

University of Queensland, School of ITEE, QLD 4072, Australia
NICTA, GPO Box 2434, Brisbane, QLD 4001, Australia
Queensland University of Technology, Brisbane, QLD 4000, Australia

Abstract

Traditional nearest points methods use all the samples in an image set to construct a single convex or affine hull model for classification. However, strong artificial features and noisy data may be generated from combinations of training samples when significant intra-class variations and/or noise occur in the image set. Existing multi-model approaches extract local models by clustering each image set individually only once, with fixed clusters used for matching with various image sets. This may not be optimal for discrimination, as undesirable environmental conditions (eg. illumination and pose variations) may result in the two closest clusters representing different characteristics of an object (eg. frontal face being compared to non-frontal face). To address the above problem, we propose a novel approach to enhance nearest points based methods by integrating affine/convex hull classification with an adapted multi-model approach. We first extract multiple local convex hulls from a query image set via maximum margin clustering to diminish the artificial variations and constrain the noise in local convex hulls. We then propose adaptive reference clustering (ARC) to constrain the clustering of each gallery image set by forcing the clusters to have resemblance to the clusters in the query image set. By applying ARC, noisy clusters in the query set can be discarded. Experiments on Honda, MoBo and ETH-80 datasets show that the proposed method outperforms single model approaches and other recent techniques, such as Sparse Approximated Nearest Points, Mutual Subspace Method and Manifold Discriminant Analysis.

1. Introduction

Compared to single image matching techniques, image set matching approaches exploit set information for improving discrimination accuracy as well as robustness to image variations, such as pose, illumination and misalignment [1, 5, 11, 20]. Image set classification techniques can be categorised into two general classes: parametric and non-parametric methods. The former represent image sets with parametric distributions [1, 4, 12]. The distance between two sets can be measured by the similarity between the estimated parameters of the distributions. However, the estimated parameters might be dissimilar if the training and test data sets of the same subject have weak statistical correlations [11, 21].

State-of-the-art non-parametric methods can be categorised into two groups: single-model and multi-model methods. Single-model methods attempt to represent sets as linear subspaces [11, 23], or affine/convex hulls [5, 10]. For single linear subspace methods, principal angles are generally used to measure the difference between two subspaces [16, 23]. As the similarity of data structures is used for comparing sets, the subspace approach can be robust to noise and relatively small number of samples [21, 23]. However, single linear subspace methods consider the structure of all data samples without selecting optimal subsets for classification.

Convex hull approaches use geometric distances (eg. Euclidean distance between closest points) to compare sets. Given two sets, the closest points between two convex hulls are calculated by least squares optimisation. As such, these methods adaptively choose optimal samples to obtain the distance between sets, allowing for a degree of intra-class variations [10]. However, as the closest points between two convex hulls are artificially generated from linear combinations of certain samples, deterioration in discrimination performance can occur if the nearest points between two hulls

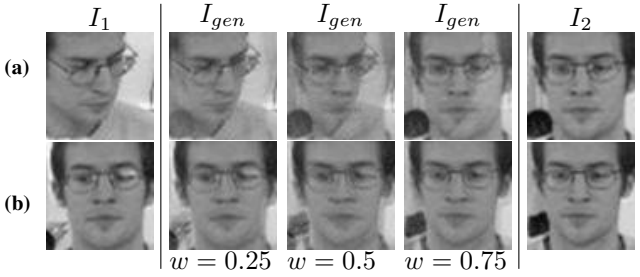

Figure 1. Illustration of artificially generated images from two training samples I_1 and I_2 via $I_{gen} = (1 - w)I_1 + wI_2$. For images in a row, the three images (denoted as I_{gen}) in the middle are generated from convex combinations of the first (denoted as I_1) and the last (denoted as I_2) images. Case **(a)**: as I_1 and I_2 are very different from each other, the generated images may contain unrealistic artificial features, such as the profile in the middle of the face in the third and fourth image. Case **(b)**: as I_1 and I_2 are similar to each other, the three generated images contain only minor artificial features.

are outliers or noisy. An example is shown in Fig. 1, where unrealistic artificial variations are generated from combinations of two distant samples.

Recent research suggest that creating multiple local linear models by clustering can considerably improve recognition accuracy [9, 20, 21]. In [8, 9], Locally Linear Embedding [15] and k-means clustering are used to extract several representative exemplars. Manifold Discriminant Analysis [20] and Manifold-Manifold Distance [21] use the notion of maximal linear patches to extract local linear models. For two sets with m and n local models, the minimum distance between their local models determines the set-to-set distance, which is acquired by $m \times n$ local model comparisons (ie. an exhaustive search).

A limitation of current multi-model approaches is that each set is clustered individually only once, resulting in fixed clusters of each set being used for classification. These clusters may not be optimal for discrimination and may result in the two closest clusters representing two separate characteristics of an object. For example, let us assume we have two face image sets of the same person, representing two conditions. The clusters in the first set represent various poses, while the clusters in the second set represent varying illumination (where the illumination is different to the illumination present in the first set). As the two sets of clusters capture two specific variations, matching image sets based on fixed cluster matching may result in a non-frontal face (eg. rotated or tilted) being compared against a frontal face.

Contributions. To address the above problems, we propose an adaptive multi convex hull classification approach to find a balance between single hull and nearest neighbour method. The proposed approach integrates affine/convex hull classification with an adapted multi-model approach. We show that Maximum Margin Clustering (MMC) can be applied to extract multiple local convex hulls that are distant from each other. The optimal number of clusters is determined by restricting the average minimal middle-point distance to control the region of unrealistic artificial variations. The adaptive reference clustering approach is proposed to enforce the clusters of an gallery image set to have resemblance to the reference clusters of the query image set.

Consider two sets S_a and S_b to be compared. The proposed approach first uses MMC to extract local convex hulls from S_a to diminish unrealistic artificial variations and to constrain the noise in local convex hulls. We prove that after local convex hulls extraction, the noisy set will be reduced. The local convex hulls extracted from S_a are treated as reference clusters to constrain the clustering of S_b. Adaptive reference clustering is proposed to force the clusters of S_b to have resemblance to the reference clusters in S_a, by adaptively selecting the closest subset of images. The distance of the closest cluster from S_b to the reference cluster of S_a is taken to indicate the distance between the two sets. Fig. 2 shows a conceptual illustration of the proposed approach. Comparisons on three benchmark datasets for face and object classification show that the proposed method consistently outperforms single hull approaches and several other recent techniques. To our knowledge, this is the first method that adaptively clusters an image set based on the reference clusters from another image set.

We continue the paper as follows. In Section 2 and 3, we briefly overview affine and convex hull classification and maximum margin clustering techniques. We then describe the proposed approach in Section 4, followed by complexity analysis in Section 5 and empirical evaluations and comparisons with other methods in Section 6. The conclusion and future research directions are summarised in Section 7.

2. Affine and Convex Hull Classification

An image set can be represented with a convex model, either an affine hull or a convex hull, and then the similarity measure between two sets can be defined as the distance between two hulls [5]. This can be considered as an enhancement of nearest neighbour classifier with an attempt to reduce sensitivity of within-class variations by artificially generating samples within the set. Given an image set $S = [I_1, I_2, ..., I_n]$, where each $I_k, k \in [1, ..., n]$ is a feature vector extracted from an image, the smallest affine subspace containing all the samples can be constructed as an affine hull model:

$$H^{aff} = \{y\}, \forall y = \sum_{k=1}^{n} w_k I_k, \sum_{k=1}^{n} w_k = 1. \quad (1)$$

Any affine combinations of the samples are included in this affine hull.

If the affine hull assumption is too lose to achieve good discrimination, a tighter approximation can be achieved by setting constraints on w_k to construct a convex hull via [5]:

$$H^{con} = \{y\}, \forall y = \sum_{k=1}^{n} w_k I_k, \ \sum_{k=1}^{n} w_k = 1, \ w_k \in [0, 1]. \quad (2)$$

The distance between two affine or convex hulls H_1 and H_2 are the smallest distance between any point in H_1 and any point in H_2:

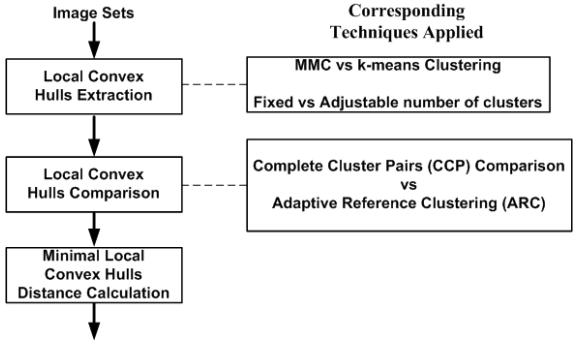
Image Sets
Corresponding Techniques Applied
Local Convex Hulls Extraction
MMC vs k-means Clustering
Fixed vs Adjustable number of clusters
Local Convex Hulls Comparison
Complete Cluster Pairs (CCP) Comparison vs Adaptive Reference Clustering (ARC)
Minimal Local Convex Hulls Distance Calculation

Figure 2. Framework of the proposed approach, including techniques used in conjunction with the proposed approach.

$$D_h(H_1, H_2) = \min_{y_1 \in H_1, y_2 \in H_2} ||y_1 - y_2||. \quad (3)$$

In [10], sparsity constraints are embedded into the distance when matching two affine hulls to enforce that the nearest points can be sparsely approximated by the combination of a few sample images.

3. Maximum Margin Clustering

Maximum Margin Clustering (MMC) extends Support Vector Machines (SVMs) from supervised learning to the more challenging task of unsupervised learning. By formulating convex relaxations of the training criterion, MMC simultaneously learns the maximum margin hyperplane and cluster labels [22] by running an SVM implicitly. Experiments show that MMC generally outperforms conventional clustering methods.

Given a point set $S = [\boldsymbol{x}_1, \boldsymbol{x}_2, \ldots, \boldsymbol{x}_n]$, MMC attempts to find the optimal hyperplane and optimal labelling for two clusters simultaneously, as follows:

$$\min_{y \in [-1,+1]} \min_{\boldsymbol{w}, b, \xi_i} \frac{1}{2}\boldsymbol{w}^T\boldsymbol{w} + \frac{C}{n}\sum\nolimits_{i=1}^{n} \xi_i \quad (4)$$
$$s.t. \quad y_i(\boldsymbol{w}^T\phi(\boldsymbol{x}_i) + b) \geq 1 - \xi_i, \ \xi_i \geq 0, \quad i = 1, \ldots, n.$$

where y_i is the label learned for point $\boldsymbol{x}_i$. Several approaches has been proposed to solve this challenging non-convex integer optimisation problem. In [19, 22], several relaxations and class balance constraints are made to convert the original MMC problem into a semi-definite programming problem to obtain the solution. Alternating optimisation techniques and cutting plane algorithms are applied on MMC individually in [24] and [25] to speed up the learning for large scale datasets. MMC can be further extended for multi-class clustering from multi-class SVM [26]:

$$\min_{y} \min_{\boldsymbol{w}_1, \ldots, \boldsymbol{w}_k, \xi} \frac{\beta}{2}\sum\nolimits_{p=1}^{k} ||\boldsymbol{w}_p||^2 + \frac{1}{n}\sum\nolimits_{i=1}^{n} \xi_i \quad (5)$$
$$s.t. \quad \boldsymbol{w}_{y_i}^T\boldsymbol{x}_i + \delta_{y_i,r} - \boldsymbol{w}_r^T\boldsymbol{x}_i \geq 1 - \xi_i$$
$$\forall i = 1, \ldots, n \quad r = 1, \ldots, k.$$

4. Proposed Adaptive Multi Convex Hull

The proposed adaptive multi convex hull classification algorithm consists of two main steps: extraction of local convex hulls and comparison of local convex hulls, which are elucidated in the following text.

4.1. Local Convex Hulls Extraction (LCHE)

Existing single convex hull based methods assume that any convex combinations of samples represent intra-class variations and thus should also be included in the hull. However, as the nearest points between two hulls are normally artificially generated from samples, they may be noisy or outliers that lead to poor discrimination performance. On the contrary, nearest neighbour method only compare samples in image sets disregarding their combinations, resulting in sensitivity to within class variations. There should be a balance between these two approaches.

We observe that under the assumption of affine (or convex) hull model, when sample points are distant from each other, linear combinations of samples will generate non-realistic artificial variations, as shown in Figure 1. This will result in deterioration of classification.

Given an image set with a noisy sample $S = [\boldsymbol{I}_1, \boldsymbol{I}_2, \ldots, \boldsymbol{I}_N, \boldsymbol{I}_{ns}]$, where $\boldsymbol{I}_i, i \in 1, \ldots, N$ are normal sample images and $\boldsymbol{I}_{ns}$ is a noisy sample, a single convex hull H can be constructed using all the samples. The clear set H_{cl} of H is defined as a set of points whose synthesis does not require the noisy data $\boldsymbol{I}_{ns}$. That is,

$$H_{cl} = \{p\}, \forall p = \sum\nolimits_i \alpha_i \boldsymbol{I}_i, \ \alpha_i \in [0, 1], \ \sum\nolimits_i \alpha_i = 1. \quad (6)$$

Accordingly, the remaining set of points in H not in H_{cl} is the noisy set H_{ns}. The synthesis of points in noisy set must require the noisy data $\boldsymbol{I}_{ns}$. That is,

$$H_{ns} = \{p_{ns}\}, \ \forall p_{ns} = \alpha_{ns}\boldsymbol{I}_{ns} + \sum\nolimits_i \alpha_i \boldsymbol{I}_i, \ p_{ns} \notin H_{cl}, \quad (7)$$
$$\alpha_{ns} \in (0, 1], \ \alpha_i \in [0, 1], \ \alpha_{ns} + \sum\nolimits_i \alpha_i = 1.$$

All of the normal samples $\boldsymbol{I}_i$ that involve the synthesis of points in H_{ns} are called the noisy sample neighbours, as they are generally in the neighbourhood of the noisy sample. The noisy set H_{ns} defines the set of points that is affected by the noisy data $\boldsymbol{I}_{ns}$. If the nearest point p between H and other convex hulls lie in the noisy set, the convex hull distance is inevitably affected by $\boldsymbol{I}_{ns}$.

By dividing the single hull H into multiple local convex hulls, $H_1, H_2, \ldots, H_n$, the noisy set is constrained to only one local convex hull. Assume the noisy sample is in one of the local convex hulls H_j, then the new noisy set $\widehat{H}_{ns}$ is defined as:

$$\widehat{H}_{ns} = \{p_{ns}\}, \ \forall p_{ns} = \alpha_{ns}\boldsymbol{I}_{ns} + \sum\nolimits_k \alpha_k \boldsymbol{I}_k, \ p_{ns} \notin H_{cl}, \quad (8)$$
$$\boldsymbol{I}_k \in H_j, \ \alpha_{ns} \in (0, 1], \ \alpha_k \in [0, 1], \ \alpha_{ns} + \sum\nolimits_k \alpha_k = 1.$$

Comparing (8) and (7), we notice that

$$\widehat{H}_{ns} \subseteq H_{ns}. \quad (9)$$

Unless all the noisy sample neighbours are in the same local convex hull as the noisy sample, the noisy set will be reduced. By controlling the number of clusters to divide the noisy sample neighbours, the noise level can be controlled. Figure 3 illustrates the effect of local convex hulls extraction on noisy set reduction.

It is therefore necessary to divide samples from a set into multiple subsets to extract multiple local convex hulls, such that samples in each subset are similar with minimal artificial features generated. Moreover, subsets should be far from each other. By dividing a single convex hull into multiple local convex hulls, unrealistic artificial variations can be diminished and noise can be constrained to local hulls.

A direct solution is to apply k-means clustering to extract local convex hulls [18]. However, the local convex hulls extracted by k-means clustering are generally very close to each other, without maximisation of distance between local convex hulls. We propose to use MMC clustering to solve this problem. For simplicity, we first investigate the problem for two local convex hulls. Given an image set $S = [\boldsymbol{I}_1, \boldsymbol{I}_2, \ldots, \boldsymbol{I}_n]$, images $\boldsymbol{I}_i, i \in 1, \ldots, n$ should be grouped into two clusters C_1 and C_2. Two local convex hulls H_1 and H_2 can be constructed from images in the two clusters individually. The two clusters should be maximally separated that any point inside the local convex hull is far from any point in the other convex hull. It is equivalent to maximise the distance between convex hulls:

$$\max_{C_1,C_2} D_h(H_1, H_2). \tag{10}$$

The solution of Eqn. (10) is equivalent to Eqn. (4). Because finding the nearest points between two convex hulls is a dual problem and has been proved to be equivalent to the SVM optimisation problem [2]. Thus,

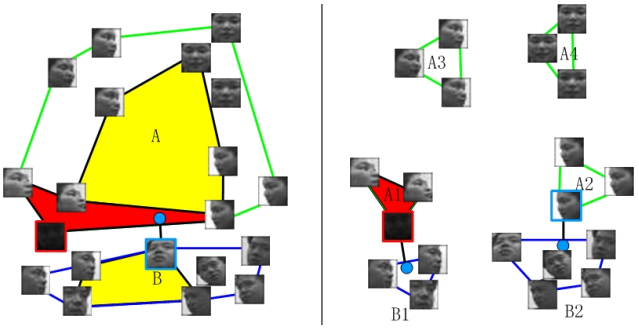

(a) **(b)**

Figure 3. Conceptual illustration of local convex hulls extraction. To compare image sets A and B, **(a)** existing single convex hull based methods use all samples in an image set to construct a model and calculate the distance between two closest points (indicated as the black line connecting the synthesised blue point and the real image with blue frame). The black image in set A is a noisy sample and the red area indicates the noisy set of A. As the blue point is synthesised from the combinations of the noisy sample and a real sample, it is also noisy. The yellow areas in A and B illustrate the region of unrealistic artificial variations generated from the combination of samples far away from each other. **(b)** The proposed method divides image set A and B into 4 and 2 clusters separately and a local convex hull is constructed for each cluster individually. The black lines indicate the distance between image subsets A1 and B1, and A2 and B2. Notice that the closest points between subsets in (b) are completely different from those in (a). The blue points are artificially generated from real samples of subset B1 and B2 separately. As blue points are closely surrounded by the real sample points, they contain less artificial features. Moreover, after clustering, the noise set (red area) is significantly reduced and the unrealistic artificial variations (yellow area) are diminished.

$$\max_{C_1,C_2} D_h(H_1, H_2) = \max_{C_1,C_2} \max_{\boldsymbol{w},b,\gamma} \gamma, \ s.t. \ \boldsymbol{w}^T \boldsymbol{I}_k + b \geq \gamma, \tag{11}$$
$$\boldsymbol{w}^T \boldsymbol{I}_m + b \leq -\gamma, \ ||\boldsymbol{w}||_2 = 1, \ \boldsymbol{I}_k \in C_1, \ \boldsymbol{I}_m \in C_2.$$

If we combine all of the images to make a set $\boldsymbol{I} = \{\boldsymbol{I}_k, \ \boldsymbol{I}_m\}$, then (11) is equivalent to:

$$\max_{C_1,C_2} D_h(H_1, H_2) = \max_{y} \max_{\boldsymbol{w},b,\gamma} \gamma, \ s.t. \ y_i(\boldsymbol{w}^T \boldsymbol{I}_i + b) \geq \gamma,$$
$$||\boldsymbol{w}||_2 = 1, y_i = \begin{cases} +1, \ \boldsymbol{I}_i \in C_1 \\ -1, \ \boldsymbol{I}_i \in C_2 \end{cases}. \tag{12}$$

Maximisation of distance between clusters is the same as maximising the discrimination margin in Eqn. (12) and is proved to be equivalent to Eqn. (4) in [22]. We thus employ the maximum margin clustering method to cluster the sample images in a set to extract two distant local convex hulls. Similarly, multi-class MMC can be used to extract multiple local convex hulls as in Eqn. (5).

4.2. Local Convex Hulls Comparison (LCHC)

In this section, we describe two approaches to compare the local convex hulls: Complete Cluster Pairs Comparison and Adaptive Reference Clustering.

4.2.1 Complete Cluster Pairs (CCP) Comparison

Similar to other multi-model approaches, local convex hulls extracted from two image sets can be used for matching by complete cluster pairs (CCP) comparisons. Assuming multiple convex hulls $H_a^1, H_a^2, ..., H_a^m$ are extracted from image set S_a, and local convex hulls $H_b^1, H_b^2, ..., H_b^n$ are extracted from image set S_b. The distance between two sets S_a and S_b is defined as the minimal distance between all possible local convex hull pairs:

$$D_{ccp}(S_a, S_b) = \min_{k,j} D_h(H_a^k, H_b^j), \forall k \in [1, m], \forall j \in [1, n]. \tag{13}$$

Although LCHE can suppress noises in local convex hulls, CCP will still inevitably match noisy data between image sets. Another drawback of this approach is that fixed clusters are extracted from each image set individually for classification. There is no guarantee that the clusters from different sets capture similar variations. Moreover, this complete comparison requires $m \times n$ convex hull comparisons, which is computational expensive.

4.2.2 Adaptive Reference Clustering (ARC)

In order to address the problems mentioned above, we propose the adaptive reference clustering (ARC) to adaptively cluster each gallery image set according to the reference clusters from the probe image set (shown in Fig. 4). Assuming image set S_a is clustered to extract local convex hulls $H_a^1, H_a^2, \ldots, H_a^m$. For all images $I_b^1, I_b^2, \ldots, I_b^N$ from image set S_b, we cluster these images according to their distance to the reference local convex hulls from set S_a. That is, each image I_b^i is clustered to the closest reference local convex hull k:

$$\min_k D_h(I_b^i, H_a^k) \ \forall k \in [1, m]. \tag{14}$$

After clustering all the images from set S_b, maximally m clusters are obtained and local convex hulls $\widehat{H}_b^1, \ldots, \widehat{H}_b^m$ can then be constructed from these clusters. Since each cluster $\widehat{H}_b^j$ is clustered according to the corresponding reference cluster H_a^j, we only need to compare the corresponding cluster pairs instead of the complete comparisons. That is

$$D_{arc}(S_a, S_b) = \min_k D_h(H_a^k, \widehat{H}_b^k), \quad \forall k \in [1, m]. \tag{15}$$

ARC is helpful to remove noisy data matching (as shown in Fig. 4). If there is a noisy cluster H_a^n in S_a, when no such noise exists in S_b, then all the images I_b^i are likely to be far from H_a^n. Therefore, no images in S_b is assigned for matching with the noisy cluster.

4.3. Adjusting Number of Clusters

One important problem for local convex hull extraction is to determine the number of clusters. This is because the *convex combination* region (*i.e*. regions of points generated from convex combination of sample points) will be reduced as the number of clusters is increased (as shown in Figure 3). The reduction may improve the system performance if the *convex combination* region contains many non-realistic artificial variations. However, the reduction will negatively impact the system performance when the regions are too small that some reasonable combinations of sample points may be discarded as well. An extreme case is that each sample point is considered as a local convex hull, such as nearest neighbour method. We thus devise an approach, denoted as average minimal middle-point distance (AMMD), to indirectly "measure" the region of non-realistic artificial variations included in the convex hull.

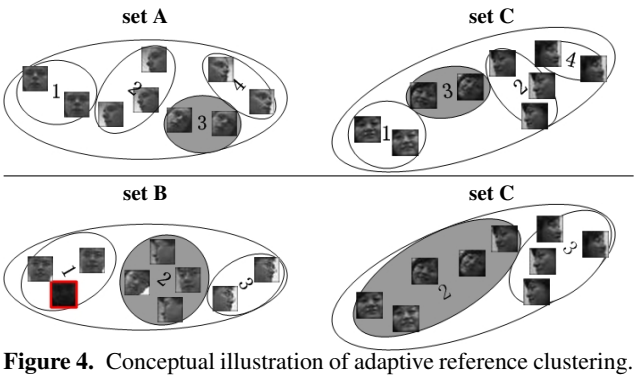

Figure 4. Conceptual illustration of adaptive reference clustering. Set C is separately clustered according to the clusters of sets A and B. Set C is divided into 4 clusters during comparison with set A. The number in each cluster of set C indicates that samples in this convex hull are close to the corresponding convex hull (with the same number) in set A. The grey cluster pair indicates the two most similar clusters in sets A and C. Set C is divided into 2 clusters when matching with set B. Cluster 1 in set B is a noisy cluster as it contains a noisy sample. All samples in set C are far from the noisy cluster in set B, therefore no samples are assigned to cluster 1. The light grey cluster pair indicates the closest two convex hulls between sets B and C.

Let I_a be a point generated from convex combination of two sample points I_i, I_j in the set S, $I_a = w_i I_i + w_j I_j, w_i + w_j = 1, w_i, w_j > 0; I_i, I_j \in S$. The minimum distance δ_i between I_a to all the sample points in the set S indicates the probability of I_a not being unrealistic artificial variations. One extreme condition is when $\delta_i = 0$, then $I_a = I_k, I_k \in S$, which means I_a is equivalent to a real sample. The further the distance, the higher the "artificialness" of point I_a. In addition, the distance between I_a and I_i, I_j must also be maximised in order to avoid measurement bias. Thus, a setting of $w_i = 0.5, w_j = 0.5$ (*i.e*. I_a as the middle point) is applied. Having this fact at our disposal, we are now ready to describe the AMMD.

For each sample point I_i in the set S, we find I_j which is its furthest sample point in S. The minimal middle-point distance of the sample point I_i is defined via:

$$\delta_i = \min_k ||I_a - I_k||_2, \forall I_k \in S. \tag{16}$$

where I_a is defined as $I_a = 0.5I_i + 0.5I_j$. Finally, the AMMD of the set S is computed via:

$$\Delta(S) = \frac{1}{N} \sum\nolimits_{i=1}^{N} \delta_i. \tag{17}$$

where N is the number of sample points included in S.

By setting a threshold Δ_{thd} to constrain AMMD, the region of non-realistic artificial variations can be controlled. An image set can be recursively divided into small clusters until the AMMD of all clusters is less than the threshold.

5. Complexity Analysis

Given two convex hulls with m and n vertexes, the basic Gilbert-Johnson-Keerthi (GJK) Distance Algorithm finds the nearest points between them with complexity $O(mn\log(mn))$ [3]. The proposed approach needs a preprocessing step to cluster two image sets by MMC with a complexity of $O(sm)$ and $O(sn)$ [26], where s is the sparsity of the data. Assuming each image set is clustered evenly with M and N clusters, to compare two local convex hulls, the complexity is $O(\frac{m}{M}\frac{n}{N}\log(\frac{m}{M}\frac{n}{N}))$. For the complete cluster pairs comparison, the total run time would be $O(MN\frac{m}{M}\frac{n}{N}\log(\frac{m}{M}\frac{n}{N})) + O(sm) + O(sn) = O(mn\log(\frac{mn}{MN})) + O(sm) + O(sn)$. The dominant term is on complete local convex hulls comparison, ie. $O(mn\log(\frac{mn}{MN}))$.

By applying the adaptive reference clustering technique, one of the image set needs to be clustered according to the reference clusters from the other set with a complexity of $O(nM\frac{m}{M}\log(\frac{m}{M}))$. Thus the total run time is $O(M\frac{m}{M}\frac{n}{N}\log(\frac{m}{M}\frac{n}{N})) + O(sm) + O(nM\frac{m}{M}\log(\frac{m}{M})) = O(mn\log(\frac{(mn)^{1/N}}{(MN)^{1/N}})) + O(sm) + O(mn\log(\frac{m}{M}))$. The dominant term is on the adaptive reference clustering, ie. $O(mn\log(\frac{m}{M}))$.

6. Experiments

We first compare the design choices offered by the proposed framework and then compare the best variant of the framework with other state-of-the-art methods.

The framework has two components: Local Convex Hulls Extraction (LCHE) and Local Convex Hulls Comparison (LCHC). There are two sub-options for LCHE: (1) Maximum Margin Clustering (MMC) versus k-means clustering (Section 3); (2) Fixed versus Adjustable number of clusters (Section 4.3). There are also two sub-options for LCHC: (1) Adaptive Reference Clustering (ARC) versus Complete Cluster Pairs (CCP) (Section 4.2.2 and 4.2.1); (2) Affine Hull Distance (AHD) versus Convex Hull Distance (CHD) (Section 2). We use two single hull methods as baseline comparisons: the method using Affine Hull Distance (AHD) [5] and the method using Convex Hull Distance (CHD) [5]. Honda/UCSD [12] is used to compare different variants of the framework to choose the best one.

We use an implementation of the algorithm proposed in [14] to solve MMC optimisation problem. To eliminate the bias on large number of images in one cluster, we only select the top m closest images to the reference cluster for the ARC algorithm, wherein m is the number of images in the reference cluster. The clusters extracted from the query image set are used as reference clusters to adaptively cluster each gallery image set individually. In this way, the reference clusters stay the same for each query, thus the distances between the query set and each gallery set are comparable.

The best performing variant of the framework will then be contrasted against the state-of-the-art approaches such as Sparse Approximated Nearest Points (SANP) [10] (a nearest point based method), Mutual Subspace Method (MSM) [23] (a subspace based method), and the Manifold Discriminant Analysis (MDA) method [20] (a multi-model based method). We obtained the implementations of all methods from the original authors. The evaluation is done in three challenging image-set datasets: Honda/UCSD [12], CMU MoBO [7] and the ETH-80 [13] datasets.

6.1. Datasets

We use the Honda/UCSD and CMU-MoBo datasets for face recognition tests. Honda dataset [12] consists of 59 video sequences of 20 subjects. There are pose, illumination and expression variations across the sequences for each subject. The CMU-MoBo dataset [7] contains 96 motion sequences of 24 subjects with four walking patterns. As in [21], face images from each frame of both face datasets were cropped and resized to 20×20. We followed the protocol of [10, 20] to conduct 10-fold cross validations on both datasets by randomly selecting one sequence for each subject for training and using the rest for testing. On the Honda/UCSD dataset, we tested on two types of image (raw and normalised via histogram equalisation), using three configurations on the number of images: randomly chosen 50, randomly chosen 100, and all images. Using a subset of images partly simulates real-world situations where a face detector or tracker may fail on some frames.

The ETH-80 dataset [13] is used for object recognition tests. It contains images of 8 object categories. Each category includes 10 object subcategories (eg. various dogs), with each subcategory having 41 orientations. We resized the images to 32×32 and treated each subcategory as an image set. For each category, we selected each subcategory in turn for training and the remaining 9 for testing.

6.2. Comparative Evaluation

We first evaluate the efficacy of the propose framework variants using CCP and ARC. Here, the comparisons only choose MMC for clustering using fixed number of clusters. Figure 5 illustrates the comparison of CCP and ARC on AHD and CHD methods for the Honda/UCSD dataset with 100 images randomly selected per set.

The results show that under optimal number of clusters, ARC and CCP outperforms the baseline counterparts (single hull with AHD and CHD), indicating that LCHE improves the discrimination of the system. ARC is consis-

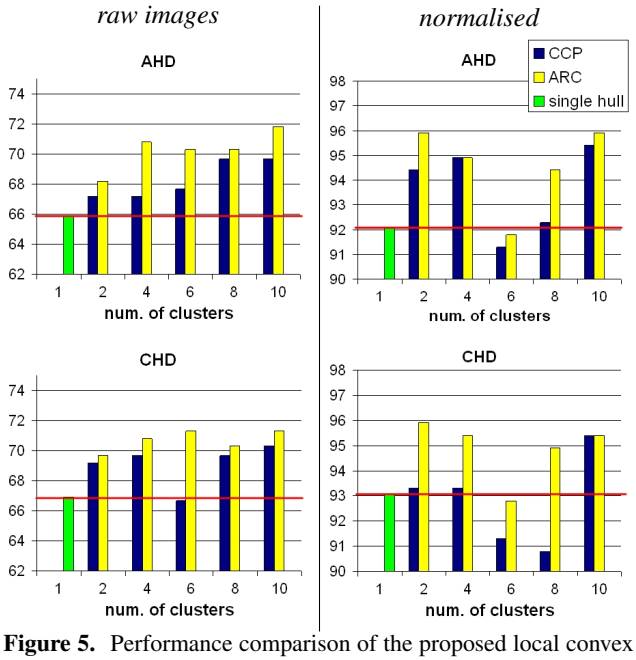

Figure 5. Performance comparison of the proposed local convex hulls extraction (LCHE) approach with single affine hull (AHD) and single convex hull (CHD) methods. Complete cluster pairs (CCP) and the adaptive reference clustering (ARC) techniques for local convex hulls comparisons are evaluated. Results are shown for the Honda/UCSD dataset with 100 images randomly selected per set. The left column contains results for raw images, while the right column for normalised images. The blue bar indicates the CCP technique and yellow bar is the ARC technique. The green bar is the result for the corresponding method using single hull, which can be considered as the baseline shown by the red line.

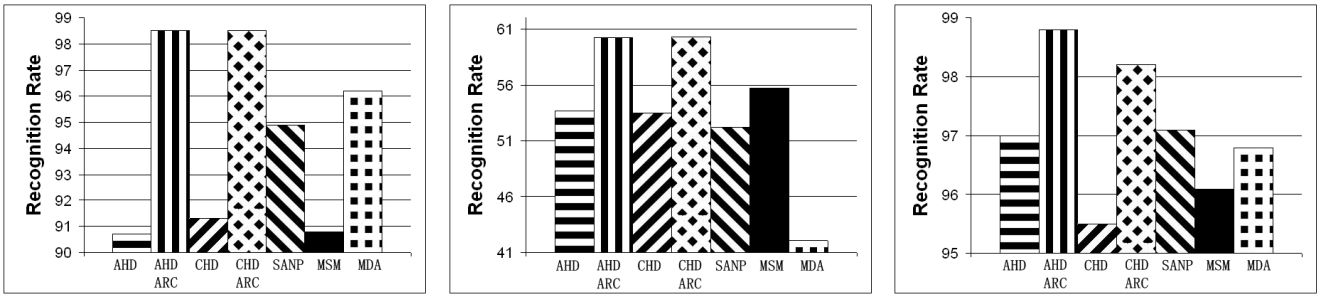

Figure 6. The proposed MMC and adjustable number of clusters combined with ARC technique compared with other methods, including SANP, MSM and MDA, on three datasets using all images. $\Delta_{thd} = 5000$ is set for all datasets for the proposed method.

tently better than CCP regardless of which number of cluster is chosen. This supports our argument that ARC guarantees the meaningful comparison between local convex hulls capturing similar variations. As ARC performs the best in all tests, we thus only use ARC for local convex hulls comparison in the following evaluations.

The evaluation results of different variants for local convex hulls extraction are shown in Table 1. We only show the hyper-parameters which give the best performance for each variant (*e.g.* the best number of cluster is shown in bracket for fixed cluster number and the best threshold value is shown in square bracket for adjustable cluster number). From this table, it is clear that all the proposed variants outperform the baseline single hull approaches, validating our argument that it is helpful to use multiple local convex hulls. MMC variants outperform the k-means counterparts indicating that maximising the local convex hull distance for clustering leads to more discrimination ability for system. The adjustable cluster number variant achieves significant performance increase over fixed number of cluster (between 1.5% points to 5.2% points). We also note that the performance for adjustable number of clusters is not very sensitive to the threshold. For instance, the performance only drops by 2% when the threshold Δ_{thd} is set to 5000 for normalised images. In summary, MMC and adjustable number of clusters combined with ARC achieve the best performance over all.

Results in Table 2 indicate that when strong noises occur in image sets, the proposed ARC approach considerably outperforms other methods, supporting our argument that ARC is helpful to remove noisy data matching. It is worthy to note that with strong noises, nearest neighbour (NN) method performs better than single hull methods.

Figure 6 is the summary of the best variant found previously contrasted with the state-of-the-art methods. Normalised images are used for Honda dataset and raw images are used for ETH-80 and CMU-MoBo datasets. A fixed threshold $\Delta_{thd} = 5000$ is set for all datasets for adjustable number of clustering. It is clear that the proposed system consistently outperforms all other methods in all datasets regardless whether AHD or CHD are used.

Table 1. Comparing maximum margin clustering (MMC) vs k-means clustering as well as fix number vs adjustable number of clusters on local convex hulls extraction. The results are shown for AHD and CHD methods combined with adaptive reference clustering (ARC) technique on the Honda/UCSD dataset using 50 images per set. For fixed number of clusters, numbers shown in brackets indicate the corresponding optimal number of clusters. For adjustable number of clusters, numbers shown in square brackets are the optimal thresholds set for average minimal middle-point distance (AMMD).

cluster number	cluster methods	image type			
		raw		norm	
		AHD ARC	CHD ARC	AHD ARC	AHD ARC
single hull		68.4	69.5	94.6	92.8
fixed	MMC	73.6 (10)	72.8 (10)	96.9 (2)	96.9 (2)
	k-means	71.5 (2)	69.7 (4)	96.9 (2)	96.4 (2)
adjustable	MMC	**75.4** [5000]	**74.9** [5000]	**99.5** [30000]	**97.9** [30000]
	k-means	71.8 [5000]	72.3 [5000]	97.4 [30000]	96.4 [30000]

Table 2. Comparing the proposed method with SANP, MSM, MDA and Nearest Neighbour (NN) on Honda data set with strong noise. 80% of the samples in each image set are replaced by noise.

AHD	AHD ARC	CHD	CHD ARC	SANP	MSM	MDA	NN
70.1	**89.0**	77.9	**89.5**	77.2	80.0	76.2	82.1

Table 3. Average time cost (in seconds) to compare two image sets on Honda dataset. The Convex Hull Distance (CHD) method combined with the proposed Complete Cluster Pairs (CCP) and Adaptive Reference Clustering (ARC) techniques are evaluated. 'noc' indicates the number of clusters.

num. of images	**CHD** [5]	**CHD CCP**		**CHD ARC**	
		noc = 2	noc = 10	noc = 2	noc = 10
50	0.23	0.67	2.79	0.73	2.32
100	1.52	2.37	5.59	2.16	4.96
all	89.8	26.6	28.2	25.4	25.2

In the last evaluation, we compare the time complexity between the variants. The average time cost to compare two image sets is shown in Table 3. For small number of images per set, extracting multiple local convex hulls is slower than using only single convex hull because of extra time for MMC and adaptive reference clustering. However, for large number (greater than 100) of images per set, the proposed method is about three times faster than the CHD method. That is because the number of images in each cluster is significantly reduced, leading to considerably lower time cost for local convex hulls comparisons.

7. Conclusions and Future Directions

In this paper, we have proposed a novel approach to find a balance between single hull methods and nearest neighbour method. Maximum margin clustering (MMC) is employed to extract multiple local convex hulls for each query image set. The adjustable number of clusters is controlled by restraining the average minimal middle-point distance to constrain the region of unrealistic artificial variations. Adaptive reference clustering (ARC) is proposed to cluster the gallery image sets resembling the clusters of the query image set. Experiments on three datasets show considerable improvement over single hull methods as well as other state-of-the-art approaches. Moreover, the proposed approach is faster than single convex hull based method and is more suitable for large image set comparisons.

Currently, the proposed approach is only investigated for MMC and k-means clustering. Other clustering methods for local convex hulls extraction, such as spectrum clustering [17] and subspace clustering [6] and their effects on various data distributions need to be investigated as well.

Acknowledgements. This research was funded by Sullivan Nicolaides Pathology, Australia and the Australian Research Council Linkage Projects Grant LP130100230. NICTA is funded by the Australian Government through the Department of Communications and the Australian Research Council through the ICT Centre of Excellence program.

References

[1] O. Arandjelovic, G. Shakhnarovich, J. Fisher, R. Cipolla, and T. Darrell. Face recognition with image sets using manifold density divergence. In *IEEE Int. Conf. Computer Vision and Pattern Recognition (CVPR)*, pages 581–588, 2005.

[2] K. P. Bennett and E. J. Bredensteiner. Duality and geometry in SVM classifiers. In *Proceedings of The 17th International Conference on Machine Learning*, 2000.

[3] S. Cameron. Enhancing GJK: Computing minimum and penetration distances between convex polyhedra. In *International Conference on Robotics and Automation*, 1997.

[4] F. Cardinaux, C. Sanderson, and S. Bengio. User authentication via adapted statistical models of face images. *IEEE Transactions on Signal Processing*, 54(1):361–373, 2006.

[5] H. Cevikalp and B. Triggs. Face recognition based on image sets. In *IEEE Int. Conf. Computer Vision and Pattern Recognition (CVPR)*, pages 2567–2573, 2010.

[6] E. Elhamifar and R. Vidal. Sparse subspace clustering. In *IEEE Int. Conf. Computer Vision and Pattern Recognition (CVPR)*, pages 2790–2797, 2009.

[7] R. Gross and J. Shi. The CMU motion of body (MoBo) database. *Technical Report CMU-RI-TR-01-18, Robotics Institute, Pittsburgh, PA*, 2001.

[8] A. Hadid and M. Pietikäinen. From still image to video-based face recognition: An experimental analysis. In *IEEE Int. Conf. Automatic Face and Gesture Recognition (AFGR)*, pages 813–818, 2004.

[9] A. Hadid and M. Pietikäinen. Manifold learning for video-to-video face recognition. In *Biometric ID Management and Multimodal Communication, Lecture Notes in Computer Science*, volume 5707, pages 9–16, 2009.

[10] Y. Hu, A. S. Mian, and R. Owens. Sparse approximated nearest points for image set classification. In *IEEE Int. Conf. Computer Vision and Pattern Recognition (CVPR)*, pages 121–128, 2011.

[11] T.-K. Kim, J. Kittler, and R. Cipolla. Discriminative learning and recognition of image set classes using canonical correlations. *IEEE Trans. Pattern Analysis and Machine Intelligence (PAMI)*, 29(6):1005–1018, 2007.

[12] K.-C. Lee, J. Ho, M.-H. Yang, and D. Kriegman. Video-based face recognition using probabilistic appearance manifolds. In *IEEE Int. Conf. Computer Vision and Pattern Recognition (CVPR)*, pages 313–320, 2003.

[13] B. Leibe and B. Schiele. Analyzing appearance and contour based methods for object categorization. In *Int. Conf. Computer Vision and Pattern Recognition (CVPR)*, pages 409–415, 2003.

[14] Y.-F. Li, I. W. Tsang, J. T. Kwok, and Z.-H. Zhou. Tighter and convex maximum margin clustering. In *Int. Conf. on Artificial Intelligence and Statistics*, 2009.

[15] S. T. Roweis and L. K. Saul. Nonlinear dimensionality reduction by locally linear embedding. *Science*, 290(5500):2323–2326, 2000.

[16] C. Sanderson, M. Harandi, Y. Wong, and B. C. Lovell. Combined learning of salient local descriptors and distance metrics for image set face verification. In *IEEE Int. Conf. Advanced Video and Signal-Based Surveillance (AVSS)*, pages 294–299, 2012.

[17] J. Shi and J. Malik. Normalized cuts and image segmentation. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 22(8):888–905, 2000.

[18] D. Steinley. K-means clustering: A half-century synthesis. *British Journal of Mathematical and Statistical Psychology*, 59:1–34, 2006.

[19] H. Valizadegan and R. Jin. Generalized maximum margin clustering and unsupervised kernel learning. In *Advances in Neural Information Processing Systems*, pages 1417–1424. MIT Press, 2007.

[20] R. Wang and X. Chen. Manifold discriminant analysis. In *IEEE Int. Conf. Computer Vision and Pattern Recognition (CVPR)*, pages 429–436, 2009.

[21] R. Wang, S. Shan, X. Chen, and W. Gao. Manifold-manifold distance with application to face recognition based on image set. In *IEEE Int. Conf. Computer Vision and Pattern Recognition (CVPR)*, pages 1–8, 2008.

[22] L. Xu, J. Neufeld, B. Larson, and D. Schuurmans. Maximum margin clustering. In *Advances in Neural Information Processing Systems*, pages 1537–1544. MIT Press, 2004.

[23] O. Yamaguchi, K. Fukui, and K.-i. Maeda. Face recognition using temporal image sequence. In *Int. Conf. Automatic Face and Gesture Recognition (AFGR)*, pages 318–323, 1998.

[24] K. Zhang, I. W. Tsang, and J. T. Kwok. Maximum margin clustering made practical. In *Proceedings of the 24th International Conference on Machine Learning*, 2007.

[25] B. Zhao, F. Wang, and C. Zhang. Efficient maximum margin clustering via cutting plane algorithm. In *The 8th SIAM International Conference on Data Mining*, 2008.

[26] B. Zhao, F. Wang, and C. Zhang. Efficient multiclass maximum margin clustering. In *Proceedings of The 25th International Conference on Machine Learning*, 2008.